




AWS
COMMERCIAL

Commercial Framing | Series 606
Single Glazed FrontGLAZE™ 150mm Framing

Key Features

- Series 606 FrontGLAZE™ framing 150mm x 50mm with the glazing pocket close to the front face. This gives us a number of significant advantages, some of these are listed below.
- We have designed the glazing pocket area to get a truly captive glazing wedge feature. This will be a significant advantage in elevated situations where you will be able to glaze from the inside without scaffolding.
- The drainage holes along the front face are concealed in the recess drip groove.
- Waterproof mullions that have been tested to resist 600Pa water, this makes the product suitable for the most extreme locations in Australia.
- Large range of transom options – internal or external glazed.
- There are numerous custom designed extrusions to cater for specific applications.
 - A range of sub-sills cover most installations.
 - Sub-head and two piece sub-jamb.
 - Numerous door threshold including weather resisting thresholds for external and internal swing doors.
 - Top hung and bottom rolling sliding door track systems.
- We have designed a couple of door systems to suit the framing. The main features with our doors are:
 - 50mm thick door that are significantly stronger than what most of our competitors offer. 44mm Doors struggle when doors are more than 2100mm high.
 - Besides the popular wrap around Series 50 door we offer a fully beaded Series 52 door. Series 50 will accept glass up to 10.38mm thick and Series 52 will accept glass from 4mm to 24mm.
 - The glazing pockets are the same width and depth as the framing. We wanted to get as much glass bite as possible.
 - Door glazing beads are braced to make sure they can withstand high wind loads.
 - Commercial doors can make their way into residential applications and for these situations we have included true French meeting stiles for pairs of door where you want to keep water out. These French meeting stiles are completely flush (no projections) and will accept recess lock face plate and lock keeper.

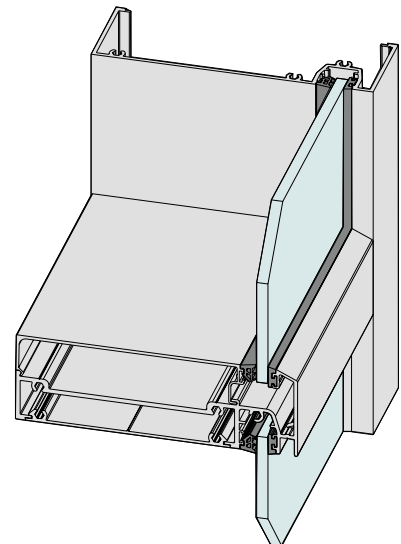

Maximum Panel Height	Various
Maximum Panel Width	Various
Maximum Glass Thickness	≤ 10.38mm

Subject to individual site conditions. Contact AWS Technical Support for information.



WERS RATED PRODUCT




3D & 2D CAD FILES AVAILABLE




PRODUCT INFORMATION AVAILABLE AT
WWW.AWSCOMMERCIAL.COM.AU




SPECIFIER ASSISTANCE AVAILABLE

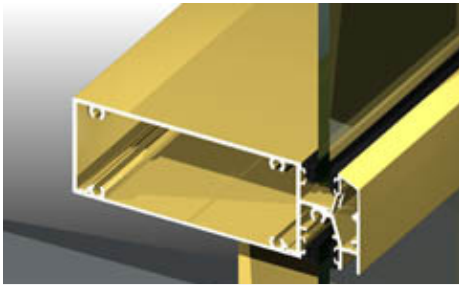


Various transoms including externally glazed shown above or internally glazed as shown below.

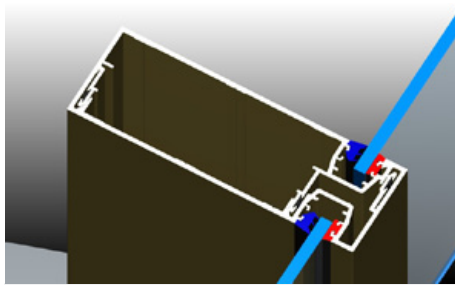


Various mullion options including interlocking to allow for expansion and contraction.

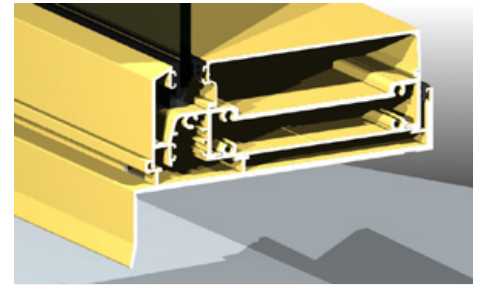


Sub Sill, Head and Jambs available.

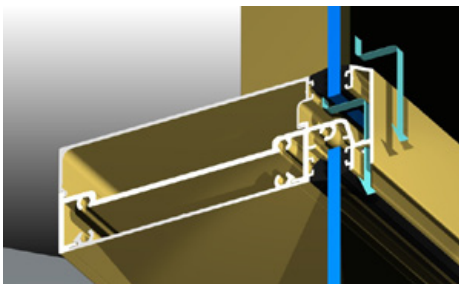

Concealed drainage designed to shed water more efficiently.

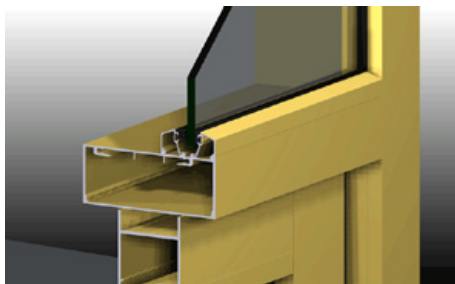

Can accept concealed overhead closers and concealed floor pivots.

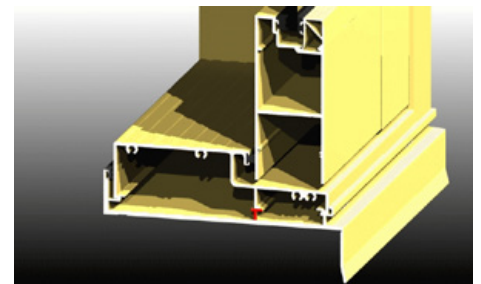

A variety of thresholds to suit different applications.



The table below lists some of the WERS rated glass and frame combinations for this system. For a complete list of all rated glass and frame combinations refer to the Series 606 WERS Data Sheet.

Single Glazed

Glass Type	COOLING	HEATING	U _w	SHGC _w	T _v w	Inf
4SnClr	36%	27%	5.07	0.55	0.60	0.72
6SnClr	37%	27%	5.03	0.54	0.59	0.72
6EVanBG	48%	24%	4.78	0.41	0.49	0.72
6EVanClr	36%	32%	4.78	0.56	0.58	0.72
6EVanGy	50%	22%	4.78	0.37	0.28	0.72
6EVanSpB	53%	19%	4.78	0.33	0.34	0.72
6EVanSpGn	53%	19%	4.78	0.33	0.42	0.72
6.38SnClr	39%	28%	4.95	0.52	0.59	0.72
6.38SnGy	48%	21%	4.95	0.40	0.28	0.72
6.38Sct	33%	36%	4.61	0.61	0.71	0.72
6.38CPNtrl	46%	29%	4.55	0.45	0.50	0.72
6.38CPClr	33%	36%	4.59	0.61	0.72	0.72
6.38CPGn	45%	29%	4.60	0.46	0.62	0.72
6.38CPGy	46%	28%	4.60	0.45	0.34	0.72
10SnClr	39%	27%	4.95	0.51	0.58	0.72
10.38Tlam	45%	30%	4.52	0.46	0.53	0.72
10.38SnClr	42%	30%	4.61	0.49	0.57	0.72