



Architectural Series | Series 650 Architectural Hinged Door


AWS
COMMERCIAL

Overview

The Series 650 Entry door framing system is designed to accept heavy duty 50mm thick commercial swing doors.

Key Features

- Entry door framing system designed to accept heavy duty 50mm thick commercial swing doors.
- 50mm wide door options including fully beaded. These heavy duty 50mm thick commercial doors are ideal for oversize door panels.
- Series 52 swing doors will accept 24mm thick insulating glass.
- Three midrail sizes to choose from (50, 115 and 125mm deep).
- Two door thresholds cover both internal and external swing hinged doors.
- Sub-sills available for high performance installations.
- Snap fit nailing fin adaptor for brick veneer and cavity brick installations.
- Will accept awning and casement sashes.
- Recessed clean fixed sidelights and highlights pocket glazed similar to commercial framing.

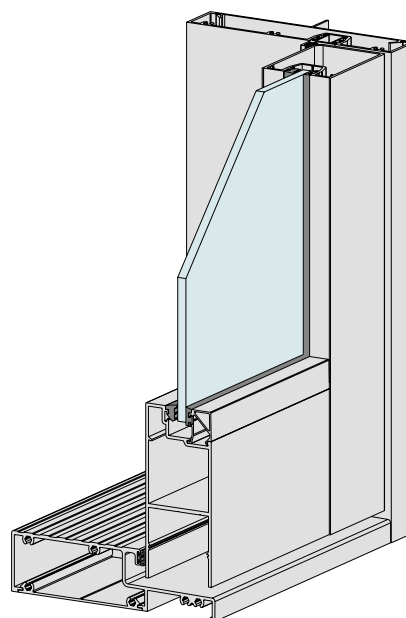

Maximum Panel Height	3000mm
Maximum Panel Width	1000mm
Maximum Glass Thickness	≤ 24mm

Subject to individual site conditions. Contact AWS Technical Support for information.



WERS RATED PRODUCT



ENHANCED ACOUSTIC PERFORMANCE




3D & 2D CAD FILES AVAILABLE




PRODUCT INFORMATION AVAILABLE AT
WWW.AWSCOMMERCIAL.COM.AU




SPECIFIER ASSISTANCE AVAILABLE

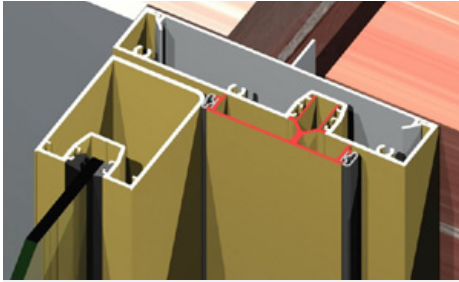


Unique double sided door stops allow for easy fitting of security door frame.

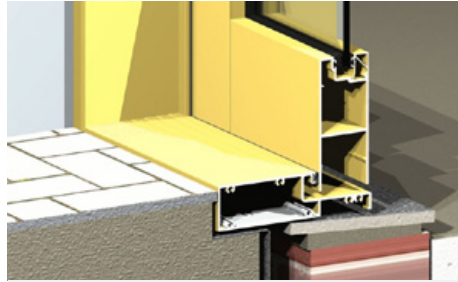


Externally opening door sill.

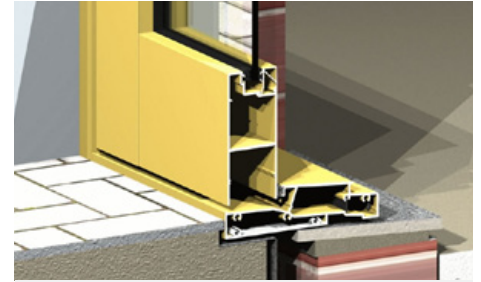


Internally opening door sill.

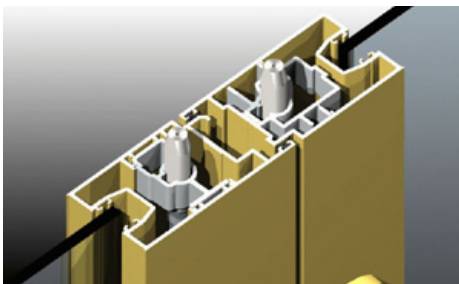

Dedicated french door meeting stiles an option.

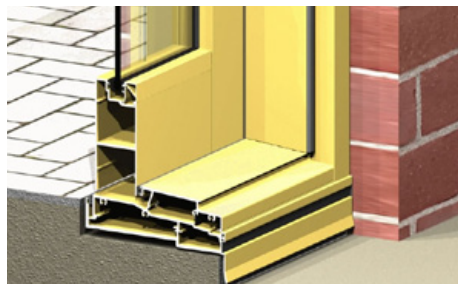


Designed to accept sub sill and sub framing as required.

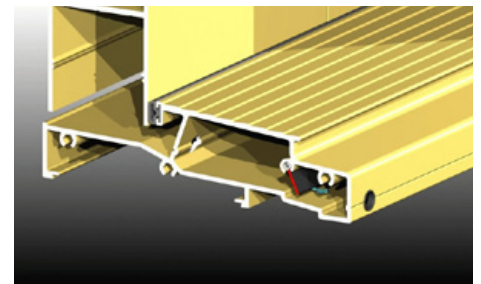

Unique self draining sills.

Typical Configurations

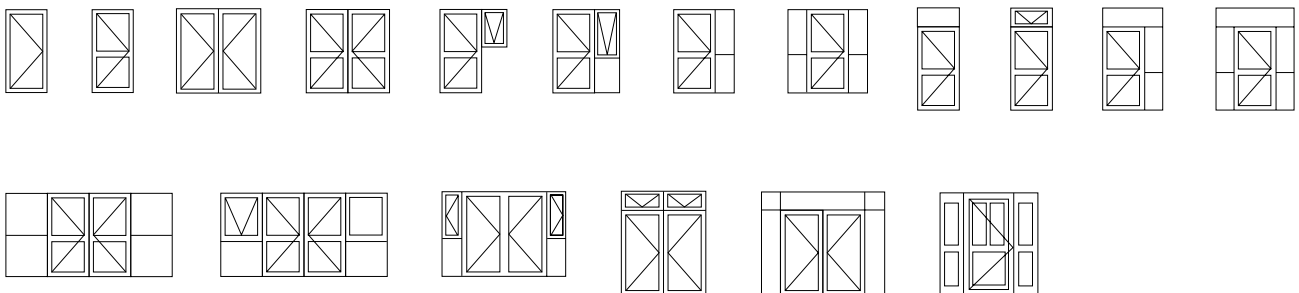

WERS RATINGS

The table below lists some of the WERS rated glass and frame combinations for this system. For a complete list of all rated glass and frame combinations refer to the Series 650 WERS Data Sheet.

Single Glazed

Glass Description	COOLING	HEATING	Uw	SHGCw	Tvw	Inf
6.38Sct	44%	34%	4.38	0.49	0.57	0.04
6.38CPClr	43%	34%	4.37	0.50	0.58	0.04
6EVanSpB	59%	19%	4.52	0.26	0.27	0.04
6EVanSpGn	59%	19%	4.53	0.26	0.33	0.04